


WRT-VP  
Farpointe Data Ranger WRT Long-Range Transmitters

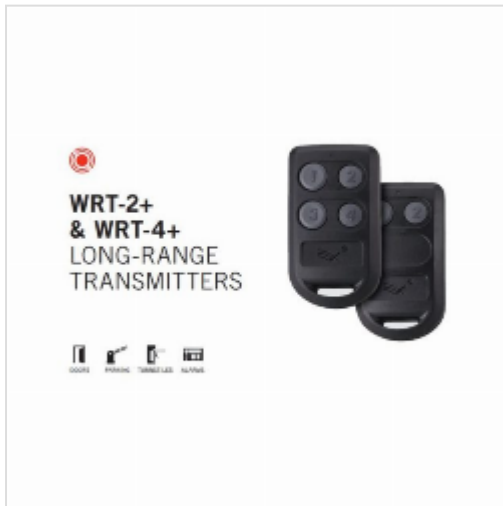

**Description**

Ranger from Farpointe Data sets the electronic security benchmark for high frequency, long-range identification Receivers and Transmitters. Ranger Transmitters are active devices powered by a commonly-available CR2032 coin cell which is user-replaceable (tip: a 20p coin fits the snap-on transmitter cover perfectly!) and can be optionally equipped with a potted proximity or contactless smartcard module so that the transmitter can be used as a conventional access control fob once in the building! The WRT transmitters are available in 2-button and 4-button versions and there are also options for if a passive credential is also required - please select your choice when placing your order.

- IP67-rated for outdoor use
- Transmitter times-out when button is held down continuously preventing battery drain and potential interference with other transmitters
- Rolling-code security combined with sophisticated encryption provide best-in-class security
- Farpointe Data MAXSecure encoding for additional security

**Product Specifications**

Weight	20.0 kg
Brand	Farpointe Data
Frequency	125 kHz (RFID), 13.56 MHz, 433 MHz
Protection-rating	IP67
Power-requirement	CR2032 Battery
Operating-temperature	-40°C to 50°C
Construction	ABS, Polycarbonate
Variations	,
Form-factor	Long Range Transmitter
Reader-and-card-technology	Proximity (125 kHz), EM Proximity (125 kHz), HID Prox (125 kHz), MIFARE, DESFire, Long Range
Programming	CSN (Chip Serial Number), Secure Sector, Unprogrammed, Custom, Open, Multi-Factor

