


920PTNNEK00000
HID RP40 multiCLASS SE Reader with Standard Prox

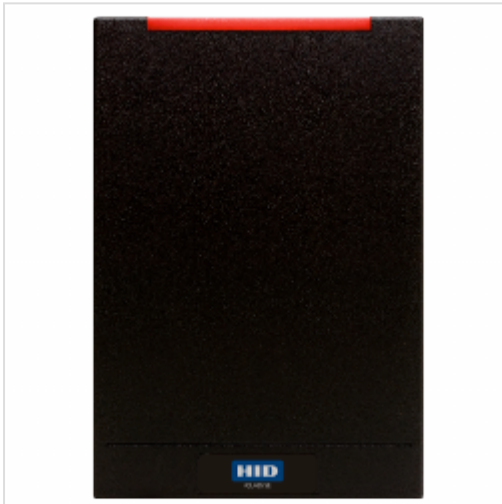

Description

The multiCLASS SE® RP40 is part of HID Global's iCLASS SE platform for adaptable, interoperable access control. Designed for multi-factor authentication door applications requiring standard wall switch mounting, multiCLASS SE® RP40 supports a broad array of 13.56 MHz high frequency and 125 kHz low frequency credential technologies and a variety of form factors, including cards, fobs and mobile devices. Configurable to support HID Mobile Access®. **Key Features:**

- **Adaptable** – Interoperable with a growing range of technologies (iCLASS Seos®, iCLASS SE, iCLASS®, MIFARE® Classic, MIFARE DESFire®EV1) and form factors including mobile devices.
- **Powerfully Secure** – The iCLASS SE platform's Secure Identity Object® (SIO®) data model provides an extra layer of encryption for additional protection of identity data
- **Standardized Communications (OSDP)** – Uses Open Supervised Device Protocol (OSDP) for secure communications between reader and controller.

Product Specifications

Weight

0 kg

